

Premium Series | Pocket Testers



pH / ORP / Conductivity / TDS / Salinity





Durable design:
IP67 Waterproof & Dustproof



Easy-to-install
Replaceable Probes




Powered by AAA batteries,
up to 2000 hours of battery life

Display Features




Measurement Mode



Calibration Mode



Reading Alarm Mode

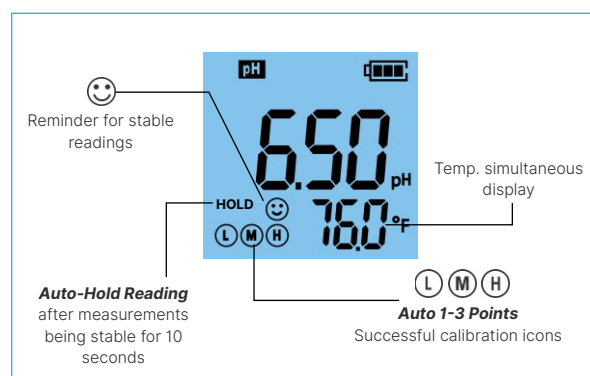

Different Probes for various applications

6 Models for your choice



PH60-E (Glass Bulb)
general water solutions
pH test



PH60F-E (Flat)
surface and small-
volume pH test



PH60S-E (Spear)
food samples pH test



ORP60-E (ORP)
ORP Test



EC60-E
(Platinum Black)
Conductivity/TDS/Salinity
Test



PC60-E (Combo)
pH/Cond./TDS/Salinity
Test

Applications



Test anywhere



Small-Volume pH Test



Skin pH Test



Food pH Test

Premium Series | Pocket Testers



	Model	PH60	PH60F	PH60S
pH	Measuring Range	-2.00 to 16.00 pH		
	Resolution/Accuracy	0.01 pH / ± 0.01 pH ± 1 digit		
	Calibration	1 to 3 point Auto Calibration		
mV	Measuring Range	± 1000 mV		
	Resolution/Accuracy	1 mV / $\pm 0.2\%$ F.S		
Temp.	Measuring Range	0 to 50.0 °C (32 to 122°F)		
Others	Temp. Compensation	Automatic 0 to 50.0 °C (32 to 122°F)		
	Reading Alarm Function	Yes		
	Self-Diagnosis	Yes		
	Low-Battery Warning	Yes		
	IP Rating	IP67 Waterproof and Dustproof		
	Power Supply	AAA Alkaline batteries x4; up to 2000 hours of battery life		
	Default Probe	PH60-E	PH60F-E	PH60S-E
	Application	General water solution's pH	Flat surface pH (textiles, skin, paper) and small-volume liquid's pH	Solid/Semi-Solid food samples (cheese, meat, fruit, sushi rice, dough, sauce, butter...)
	Compatible Probes	PH60-E, PH60F-E, PH60S-E, ORP60-E		

PH60 COMPLETE TEST KIT





	Model	PC60	EC60	ORP60
pH	Range	-2.00 to 16.00 pH	/	/
	Resolution/Accuracy	0.01 pH / ±0.01 pH±1 digit	/	/
	Calibration	1 to 3 Points Auto Calibration	/	/
mV	Range	/	/	±1000 mV
	Resolution/Accuracy	/	/	1 mV / ±0.2% F.S
Cond.	Range	0 µS/cm to 20.00 mS/cm	0 µS/cm to 20.00 mS/cm	/
	Resolution/Accuracy	0.1/1 µS, 0.01 mS / ±1% F.S	0.1/1 µS, 0.01 mS / ±1% F.S	/
	Calibration	1 to 3 Points Auto Calibration	1 to 3 Points Auto Calibration	1 Point Manual Calibration
	Temp. Coefficient	0.00 to 4.00%/°C	0.00 to 4.00%/°C	/
TDS	Range	0.0 ppm to 10.00 ppt	0.0 ppm to 10.00 ppt	/
	TDS Conversion Factor	0.4 to 1.0	0.4 to 1.0	/
Salinity	Range	0 to 10.00 ppt	0 to 10.00 ppt	/
Temp.	Range	0 to 50.0 °C (32 to 122°F)		
Others	Temp. Compensation	Yes		No
	Reading Alarm Function	No	No	Yes
	Self-Diagnosis	Yes		
	Low-Battery Alarm	Yes		
	IP Rating	IP67 Waterproof and Dustproof		
	Power Supply	AAA alkaline batteries x4; battery life up to 1000 hours		AAA alkaline batteries x4; battery life up to 2000 hours
	Default Probe	PC60-E	EC60-E	ORP60-E
	Compatible Probes	PH60-E, PH60F-E, PH60S-E, PC60-E, EC60-E	EC60-E	ORP60-E